


# PROBE WITH STAINLESS STEEL SLEEVE

## PLUG-IN THERMOCOUPLE WITH CONNECTION CABLE T260

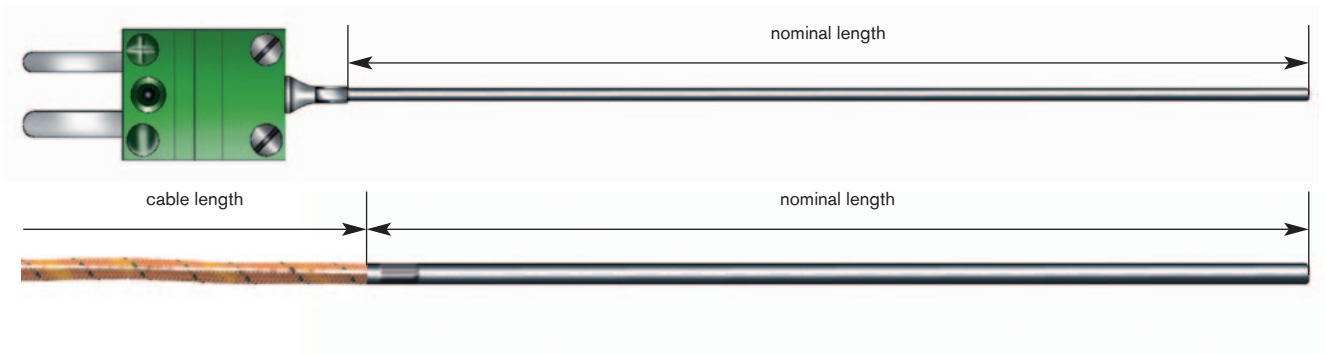

| connection cable                                   | construction                            | temperature |
|--|---|-------------|
| <input type="checkbox"/> THEL 0,22 mm <sup>2</sup> | strand/fiber glass/fiber glass/Pi foil  | +400°C      |
| <input type="checkbox"/> THEL 0,22 mmØ             | wire/Pi foil/Pi foil, bare wire (+ leg) | +400°C      |

### Thermocouple:

- 1 x type L
- 1 x type J
- 1 x type K
- other thermocouples: \_\_\_\_\_

type J and K acc. to DIN EN 60584  
type L acc. to DIN 43710

### Sleeve-Ø:

- 1,5 mm (only possible with THEL 0,20 mmØ)
- 3,0 mm

### Type of cable ends:

- bare ends
- cable lugs M4
- end sleeve
- miniature plug
- miniature sockets
- other cable ends: \_\_\_\_\_

### Connection cable:

- 1,0 m
- 1,5 m
- 2,0 m
- 2,5 m
- 3,0 m
- 4,0 m
- 5,0 m
- 10,0 m
- other cable length: \_\_\_\_\_

### Type of measuring tip:

- Form A, insulated measuring tip
- Form B, welded measuring tip

Nominal length: \_\_\_\_\_ mm



**High temperature probe  
with stainless steel sleeve!**