


T434 / T435 PLUG-IN PROTECTING ARMATURES

for gauge slides \varnothing 3 mm / \varnothing 6 mm

T434 / FOR GAUGE SLIDE \varnothing 3 mm

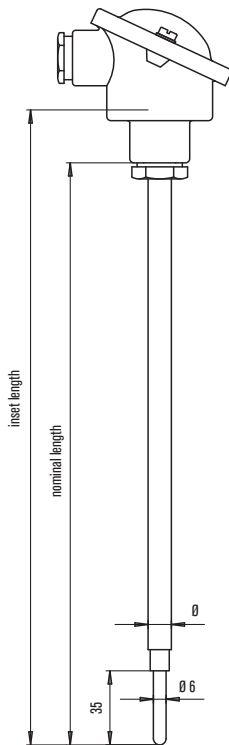

PROTECTING TUBE FORM VKS WITH TAPERED MEASURING TIP:

- 1.4571 \varnothing 12 x 2,5 mm

GAUGE SLIDE:

- without gauge slide with gauge slide: _____

SCREWED THREAD:

- G 1/2 A - clamping screw connection without
 1/2" NPT - clamping screw connection

CONNECTION HEAD:


- B (KE 122) DAN-WZ (KE 202) without
 DAN-Z (KE 064) DAN-WS (KE 204) other connection head: _____
 DAN-S (KE 066) BNK (KK 029)

NOMINAL / INSET LENGTH:

- 250/275 mm 380/405 mm 530/555 mm
 290/315 mm 410/435 mm 630/655 mm
 350/375 mm 500/525 mm other length: _____

ADDITIONAL INFORMATION:

T435 / FOR GAUGE SLIDE \varnothing 6 mm

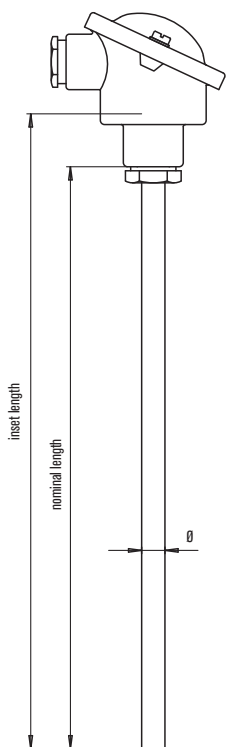

PROTECTING TUBE FORM VK:

- 1.4571 \varnothing 12 x 2,5 mm 1.4571 \varnothing 10 x 1,5 mm
 1.4571 \varnothing 10 x 2 mm 1.4571 \varnothing 8 x 0,75 mm

GAUGE SLIDE:

- without gauge slide with gauge slide: _____

SCREWED THREAD:

- without G 1/2 A - clamping screw connection
 G 1/4 A - clamping screw connection 1/2" NPT - clamping screw connection

CONNECTION HEAD:

- B (KE 122) DAN-WZ (KE 202) without
 DAN-Z (KE 064) DAN-WS (KE 204) other connection head: _____
 DAN-S (KE 066) BNK (KK 029)

NOMINAL / INSET LENGTH:

- 250/275 mm 380/405 mm 530/555 mm
 290/315 mm 410/435 mm 630/655 mm
 350/375 mm 500/525 mm other length: _____

ADDITIONAL INFORMATION:
