


T720 / T721 RTD (MINERAL INSULATED) GAUGE SLIDES

T720 with 1 transmitter

T721 with 1 transmitter and with connection for the second transmitter

T720

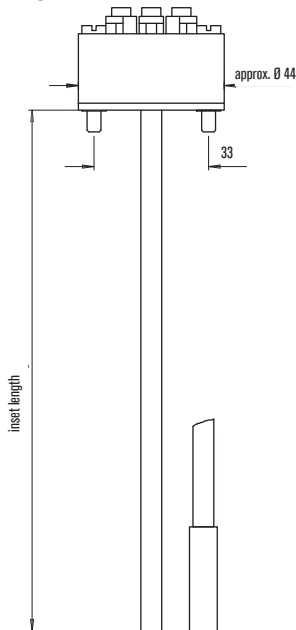

RTD:

- 1 x Pt 100 class B (T720) 2 x Pt 100 class B (T721)
- 1 x Pt 100 class A (T720) 2 x Pt 100 class A (T721)


CONNECTION TYPE OF INNER WIRES:

- 2 – wire circuit (T720 + T721)
- 3 – wire circuit (T720 + T721)
- 4 – wire circuit (only T720)

Ø SHEATH / MEASURING TIP / MATERIAL NO.:

- 3.0/3.0/1.4541 6.0/6.0/1.4541
- 4.5/4.5/1.4541 6.0/8.0/1.4541

T721

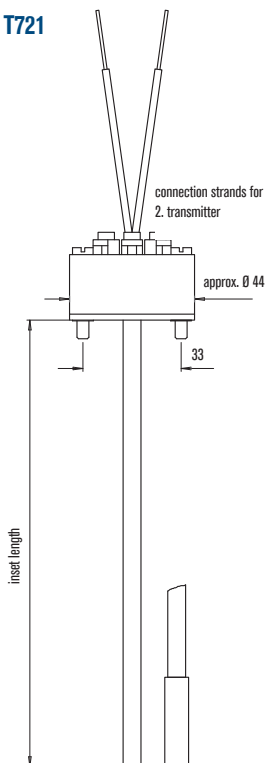

MEASURING TEMPERATURE RANGE:

- 50 ... +400°C
- 50 ... +600°C

INSET LENGTH:

- | | | |
|---------------------------------|---------------------------------|----------------------------------------------|
| <input type="checkbox"/> 145 mm | <input type="checkbox"/> 405 mm | <input type="checkbox"/> 825 mm |
| <input type="checkbox"/> 205 mm | <input type="checkbox"/> 430 mm | <input type="checkbox"/> 1025 mm |
| <input type="checkbox"/> 255 mm | <input type="checkbox"/> 435 mm | <input type="checkbox"/> 1275 mm |
| <input type="checkbox"/> 275 mm | <input type="checkbox"/> 455 mm | <input type="checkbox"/> 1425 mm |
| <input type="checkbox"/> 290 mm | <input type="checkbox"/> 525 mm | <input type="checkbox"/> 1625 mm |
| <input type="checkbox"/> 315 mm | <input type="checkbox"/> 580 mm | <input type="checkbox"/> 1825 mm |
| <input type="checkbox"/> 340 mm | <input type="checkbox"/> 655 mm | <input type="checkbox"/> 2025 mm |
| <input type="checkbox"/> 375 mm | <input type="checkbox"/> 735 mm | <input type="checkbox"/> other length: _____ |