


Example: Control cable for the automotive industry



Special PUR connection cable with numbered cores and overall copper screen

item no. 07649065

cross 23 x 1.0 mm² +
sections (2 x 1.0 mm²) D +
1 x 1.0 mm²

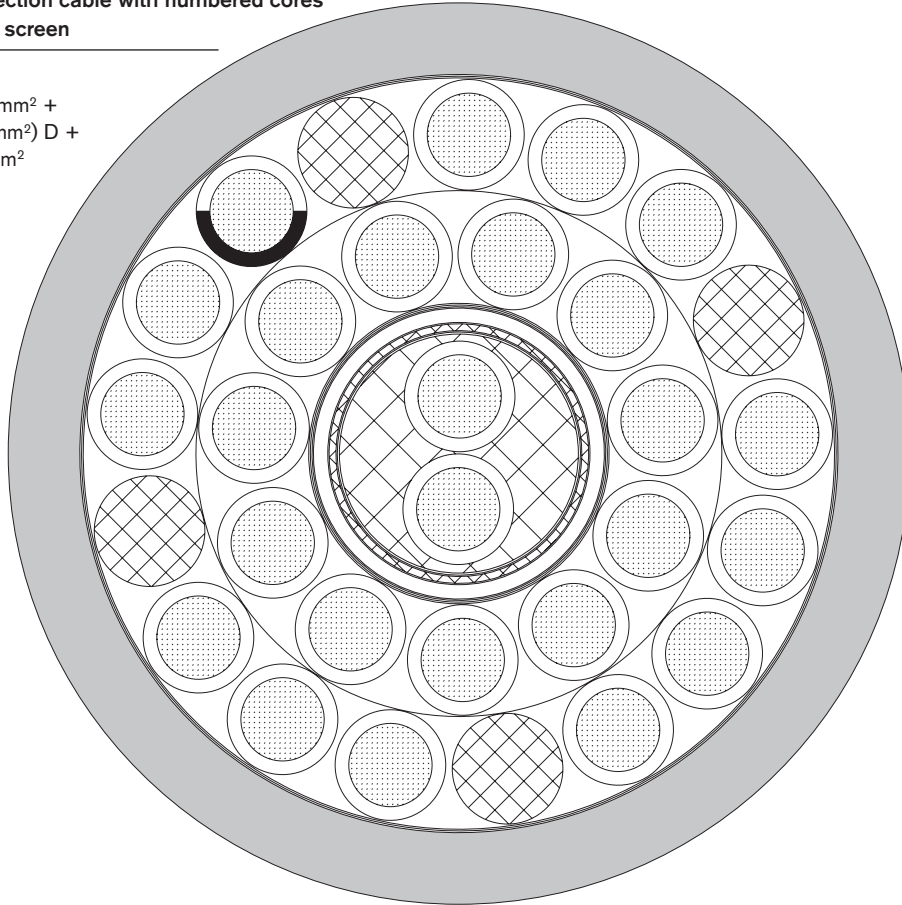

G
8

Construction:

Conductor:	tinned copper strands
Insulation:	TPE
Colour code:	white cores with consecutive numbers acc. to EN 50334 and a green-yellow earth wire
Screen:	wrapped with tinned copper braiding
Inner sheath:	TPE
Sheath colour:	black (RAL 9005)
Sheath material:	special PUR
Sheath colour:	black (RAL 9005)

Technical data:

Peak operating voltage:	max. 350 V
Testing voltage:	core/core 1500 V core/screen 1000 V
Min. bending radius:	7.5 x d
Temperature range	
fixed laying:	-50/+90 °C
flexible application:	-40/+90 °C
Absence of harmful substances:	acc. to RoHS directive of the European Union see page N/17