




CC 600 PVC control cable with numbered black cores, AWG 8 - AWG 1

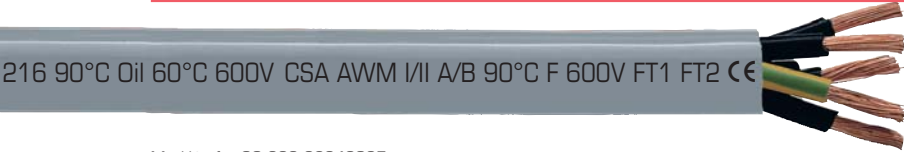

Marking for CC 600 02040805:

SAB BRÖCKSKES · D-VIERSEN · CC 600 8 AWG/5c 02040805 AWM Style 21216 90°C Oil 60°C 600V CSA AWM I/II A/B 90°C F 600V FT1 FT2 CE

Construction:

Conductor:	bare copper strands acc. to UL/CSA
Insulation:	special PVC acc. to DIN VDE and UL/CSA
Colour code:	black cores with consecutive numbers; green-yellow earth wire from 3 cores
Stranding:	in layers
Sheath material:	special oil resistant PVC acc. to DIN VDE and UL/CSA
Sheath colour:	grey (RAL 7000)

Outstanding features:

- UL recognized, CSA approved
- high mechanical loading capacity
- oil resistant
- on request construction with metric conductor stranding and VDE-Reg. no.
- EAC approval

Technical data:

Nominal voltage:	DIN VDE U ₀ /U 300/500 V	UL/CSA 600 V
Testing voltage U:	3000 V acc. to DIN VDE 0281 part 2 + HD 21.2	
Min. bending radius		
<i>fixed laying:</i>	4 x d	
<i>flexible application:</i>	6 x d	
Radiation resistance:	8 x 10 ⁷ cJ/kg	
Temperature range	DIN VDE	UL/CSA
<i>fixed laying:</i>	-40/+70 °C	up to +90°C
<i>flexible application:</i>	+5/+70 °C	up to +90°C
Fire performance:	flame retardant and self-extinguishing acc. to IEC 60332-1-2 + EN 60332-1-2, UL VW-1, CSA FT1 + FT2	
Oil resistance:	very good - TM5 acc. to DIN VDE 0281 part 1 + HD 21.1, Oil 60 °C acc. to UL 758, Fuel Oil acc. to CSA-C 22.2 No. 210-05	
Chem. resistance:	see page N/11	
Absence of harmful substances:	acc. to RoHS directive of the European Union see page N/17	

item no.	no. of cores x cross section n x AWG	largest single wire ø mm	outer-ø ± 5% mm	copper figure kg/km	cable weight ≈ kg/km
02040803	3 x 8	0,41	15,3	253,4	449
02040804	4 x 8	0,41	17,0	337,9	570
02040805	5 x 8	0,41	18,9	422,4	696
02040604	4 x 6	0,41	20,9	541,4	845
02040605	5 x 6	0,41	23,6	676,8	969
02040404	4 x 4	0,41	25,6	844,8	1360
02040204	4 x 2	0,41	30,4	1344,0	2007
02040104	4 x 1	0,41	33,2	1651,2	2464

Other dimensions and colours are possible on request.