


Also available in type K, T or L\* and classes 1 or 2!

For the temperature collection at plastics processing machines. Fixing by bayonet joint. Bayonet freely adjustable on spring. The steel wire armouring of the connection cable is used as mechanical protection.

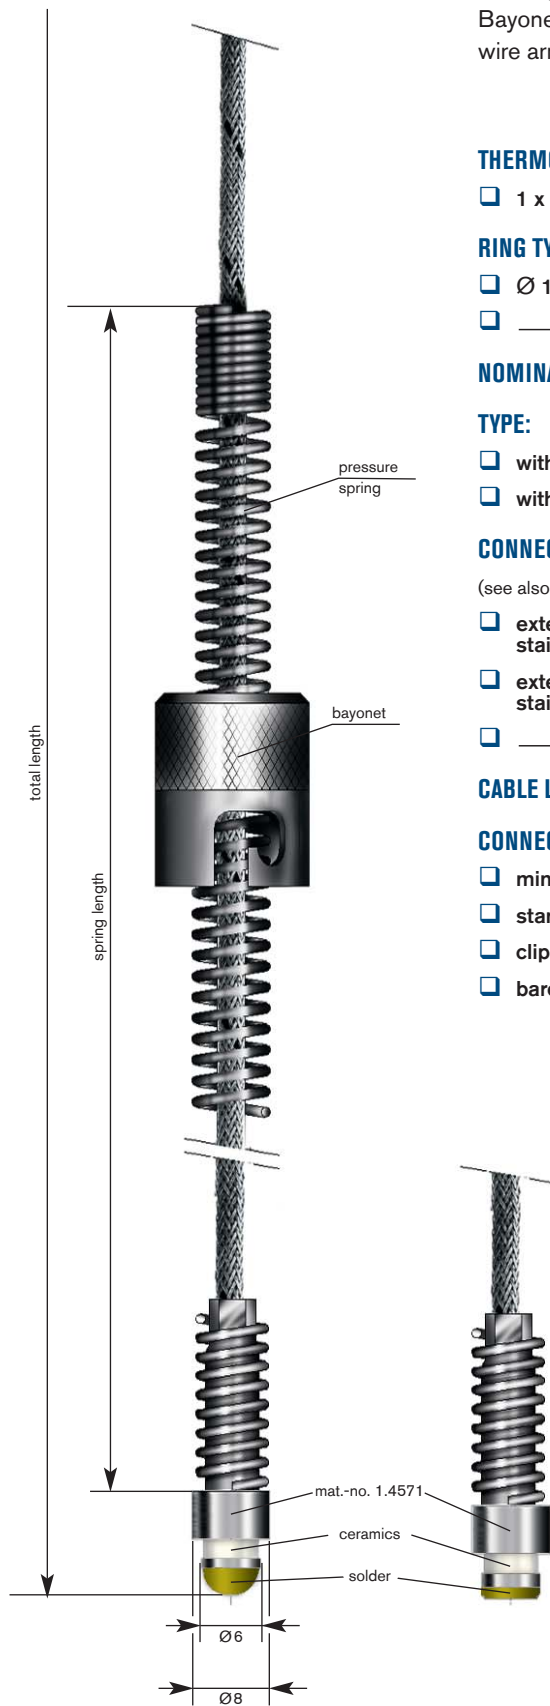

### THERMOCOUPLE - CLASS 2, FORM B:

- 1 x type J
- 1 x type K
- other thermocouples: \_\_\_\_\_

### RING TYPE:

- Ø 14 / 4,5 mm CuSn 6
- \_\_\_\_\_

NOMINAL LENGTH: \_\_\_\_\_mm

### TYPE:

- with kink protection (shrinkable sleeve)
- with fiberglass sleeve (shrinkable sleeve)

### CONNECTION CABLE:

(see also survey of connecting cables for thermocouples)

- extension cable strand/fiber glass/fiber glass/stainless steel wire armouring +400°C
- extension cable strand/PFA/fiber glass/stainless steel wire armouring +250°C
- \_\_\_\_\_

CABLE LENGTH: \_\_\_\_\_m

### CONNECTION ENDS:

- miniature thermoplug
- miniature socket
- standard plug
- Lemo plug type \_\_\_\_\_
- clips
- Lemo socket type \_\_\_\_\_
- bare ends
- other cable ends \_\_\_\_\_

Due to the integrated ceramic as thermal insulation, an excellent response time is guaranteed.



- The above mentioned technical data are standard data.
- Individual parameters, e. g. connection cable, insulated type, spring length, bayonet or cable end can be added or modified on request.