


T433 / T445 SCREW-IN PROTECTING ARMATURES

for gauge slides \varnothing 3 mm / \varnothing 6 mm

T433 / FOR GAUGE SLIDE \varnothing 3 mm

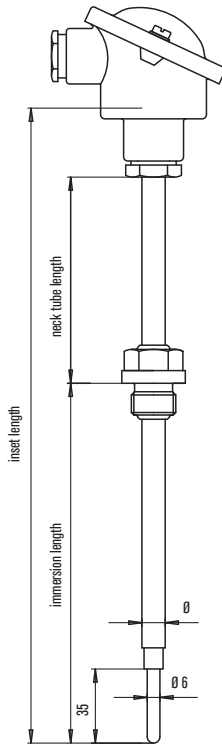

PROTECTING TUBE FORM BS WITH TAPERED MEASURING TIP:

- 1.4571 \varnothing 11 x 2 mm

GAUGE SLIDE:

- without gauge slide with gauge slide: _____

SCREWED THREAD:

- G 1/2 A G 3/4 A G 1 A
 M 20 x 1,5 without other thread: _____

CONNECTION HEAD:


- B (KE 122) DAN-WZ (KE 202) without
 DAN-Z (KE 064) DAN-WS (KE 204) other connection head: _____
 DAN-S (KE 066) BNK (KK 029)

IMMERSION / NECK TUBE / INSET LENGTH:

- 100/120/255 mm 400/120/555 mm 670/120/825 mm
 160/120/315 mm 500/120/655 mm 870/120/1025 mm
 250/120/405 mm 580/120/735 mm other length: _____

ADDITIONAL INFORMATION:

T445 / FOR GAUGE SLIDE \varnothing 6 mm

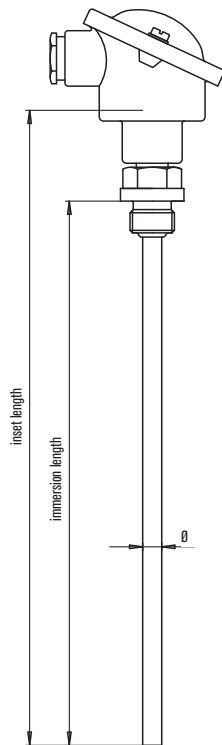

PROTECTING TUBE FORM BO WITHOUT NECK TUBE:

- 1.4571 \varnothing 9 x 1 mm 1.4571 \varnothing 11 x 2 mm
 1.4571 \varnothing 8 x 0,9 mm 1.4571 \varnothing 12 x 2,5 mm

GAUGE SLIDE:

- without gauge slide with gauge slide: _____

SCREWED THREAD:

- G 1/2 A G 3/4 A G 1 A
 M 20 x 1,5 without other thread: _____

CONNECTION HEAD:

- B (KE 021) DAN-WZ (KE 201) without
 DAN-Z (KE 063) DAN-WS (KE 203) other connection head: _____
 DAN-S (KE 065) BNK (KK 028)

IMMERSION / INSET LENGTH:

- 100/145 mm 250/295 mm
 160/205 mm 400/445 mm other length: _____

ADDITIONAL INFORMATION:
