
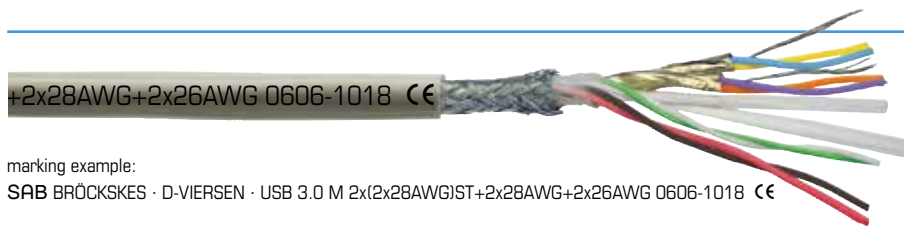


USB 3.0 cables

USB 3.0 M

flexible USB 3.0 cable for the application in medical technology

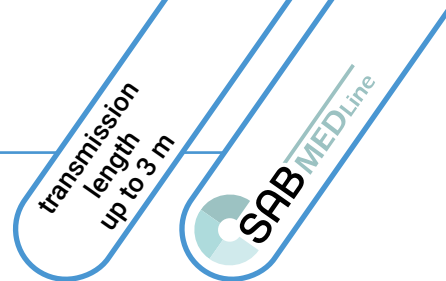

marking example:

SAB BRÖCKSKES · D-VIERSEN · USB 3.0 M 2x(2x28AWG)ST+2x28AWG+2x26AWG 0606-1018 CE

Construction:	
Conductor:	28 AWG: silver plated copper, fine wires 26 AWG: tinned copper strands, fine wires
Insulation:	FEP
Colour code:	28 AWG: yellow, blue + orange, violet (USB 3.0), green, white (USB 2.0), 26 AWG: red, black (power supply)
Stranding:	USB 3.0 twisted and screened pairs, USB 2.0 twisted pairs, all elements together
Drain wire:	bare copper strands, fine wires
Screen:	alu foil
Stranding:	all USB 3.0 elements twisted together
Wrapping:	foil
Screen:	tinned copper braiding
Sheath material:	SABmed S
Sheath colour:	grey (RAL 7000)

Technical data:	
Peak operating voltage:	max. 50 V
Testing voltage:	core/core 600 V core/screen 600 V
Min. bending radius	
fixed laying:	5 x d
flexible application:	10 x d
Temperature range	
fixed laying:	-40/+180 °C
flexible application:	-25/+180 °C
Impedance of data pairs:	nom. 90Ω
Absence of harmful substances:	acc. to RoHS directive of the European Union, see chapter N „Technical data“

- ### Outstanding features:
- » biocompatible sheath material
 - » biological harmlessness acc. to EN ISO 10993-1,
cytotoxicity acc. to EN ISO 10993-5
 - » high temperature resistant
 - » high notch and tear resistance
 - » very good flexibility
 - » non-adhesive surface

item no.	type	dimension	outer-ø ± 10% mm	copper figure kg/km	cable weight ≈ kg/km	ohmic resistance at 20°C max.Ω/km	
						28 AWG	26 AWG
06061018	USB 3.0 M	2 x (2 x 28 AWG)ST + 2 x 28 AWG + 2 x 26 AWG	5,6	25,4	48	223	140

Other dimensions and colours are possible on request.

For transmission lengths more than 3 m, please contact us!

Also possible as harnessed cable with USB type A and USB type B plug!